



GPXCEL GENERAL PURPOSE


This product offers excellent cutting speeds and lifetime providing consistent results in non abrasive building products.

KEY FEATURES

- Alternate Castellated Segment - for fast stock removal
- High Quality Laser Scrolled Steel Centre - for reduced resonance
- Laser Welded Segments
- High Diamond Concentration



Mexco Diamond Blade product packaging

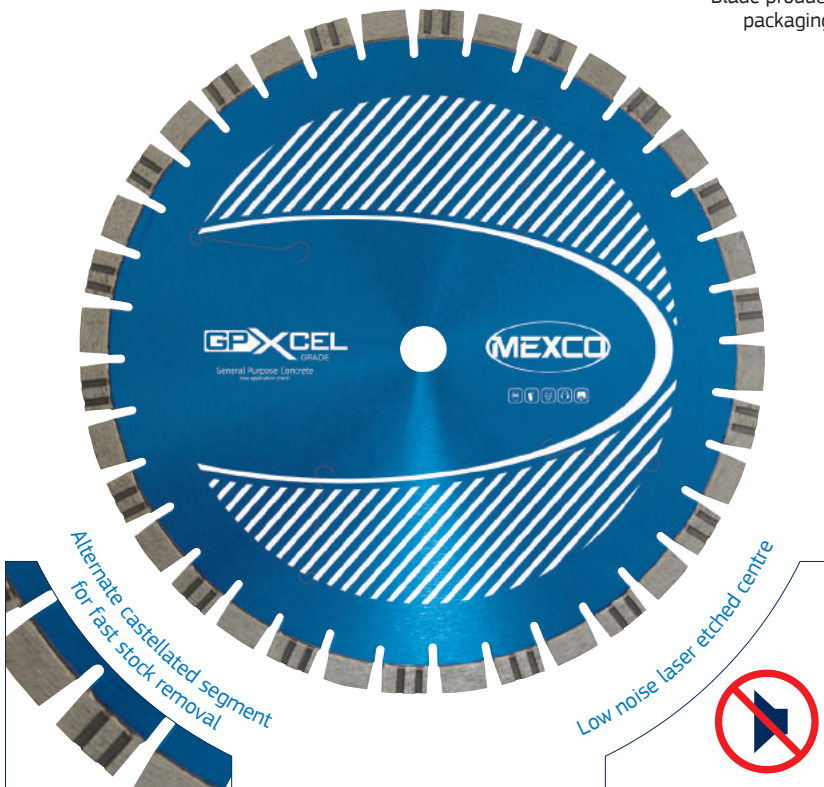

PRODUCT OVERVIEW:

Grade: XCEL
Segment Height: 12mm
Segment Attachment: Laser Welded
Dry/Wet: Wet or Dry Use
Recommended for: Angle Grinder, Disc Cutter & Bench Saw
Segment Type: Segmented
Alternating Castellated Segment
Gullet Type: Medium Gullet

XCEL GRADE | OPTIMUM COST PER CUT

The XCEL range of products are simply our best in class, due to an uncompromised use of raw materials in their manufacture they offer the user a cutting or drilling experience that is faster and cleaner with an optimum cost per cut.




PRODUCT DATA SHEET

DIAMETERS AVAILABLE:

Code	Diameter		Segment Width (mm)	Bore Size / s (mm)
	(mm)	(in)		
GPXCEL18022	180	7	2.6	22.23
GPXCEL23022	230	9	2.6	22.23
GPXCEL30020	300	12	3.2	20
GPXCEL35020	350	14	3.2	20
GPXCEL35025	350	14	3.2	25.4
GPXCEL40020	400	16	3.6	20
GPXCEL40025	400	16	3.6	25.4

SUITABLE FOR USE ON:




APPLICATION:

- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Paviments
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone



Hard Slate



Flint Aggregate Concrete




Reinforced Concrete



Concrete Kerbs



Concrete Slabs



Reinforced Lintels

- **RECOMMENDED** to cut these materials
- **Will cut these materials** with the possibility of reduced lifetime / glazing

CONFORMS TO EN13236